


Photodiode modules

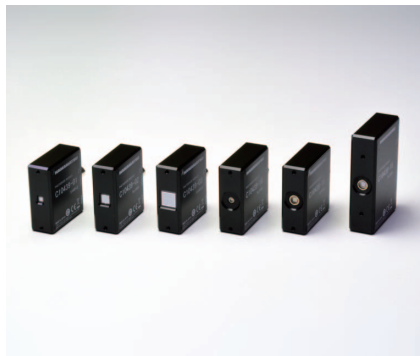

C10439 series

Integrates photodiode for precision photometry with low-noise amp

The C10439 series photodiode modules are high-precision photodetectors that integrate a photodiode and a current-to-voltage amplifier. The output from these photodiode modules is an analog voltage and can be easily checked with a voltmeter, etc. Since their sensitivity is switchable between two ranges (High/Low), highly accurate output can be obtained by selecting the proper sensitivity range that matches the light level to be detected.

Features

- Voltage output for easy handling
- Two-range (High/Low) switching function
- Compact: half size of a business card (C10439-01/-02/-03/-07/-08/-09/-10/-11/-14) business card size (C10439-15)
- Can be mounted on optical bench rod (M4)

Applications

- Precision photometry, light source power monitors, fluorescence detection of printed matter, illuminometers, color difference meters, brix meter, flowmeters (C10439-01/-02/-03/-07/-08/-09/-10/-11)
- Gas detection (CH₄, CO₂, CO, etc.), flame detection (C10439-14)
- Spectrophotometers, radiation thermometers (C10439-15)

Structure

Type no.	Photodiode type	Photosensitive area (mm)	Dimensions (mm)
C10439-01	Si	2.4 × 2.4	19 × 46 × 52
C10439-02		5.8 × 5.8	
C10439-03		10 × 10	
C10439-07		2.4 × 2.4	
C10439-08		5.8 × 5.8	
C10439-09		10 × 10	
C10439-10	InGaAs	φ1	19 × 50 × 52
C10439-11		φ3	
C10439-14	InAsSb	0.7 × 0.7	19 × 50 × 52
C10439-15	Si	2.4 × 2.4	19 × 50 × 75
	InGaAs	φ1	

Recommended conditions/Absolute maximum ratings (Ta=25 °C unless otherwise noted)

Type no.	Supply voltage Vs (V)		Current consumption Is Max. Dark state (mA)	Capacitive load CL Max. (pF)	Output resistance Ro (Ω)	Absolute maximum ratings		
	Min.	Max.				Supply voltage Vs max (V)	Operating temperature Topr*1 (°C)	Storage temperature Tstg*1 (°C)
C10439-01	±5	±12	±2	1000	100	±13	0 to +50	-10 to +60
C10439-02								
C10439-03								
C10439-07								
C10439-08								
C10439-09								
C10439-10								
C10439-11								
C10439-14								
C10439-15								
			±15					

*1: No dew condensation

When there is a temperature difference between a product and the surrounding area in high humidity environment, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

Electrical and optical characteristics (Ta=25 °C, Vs=±12 V, unless otherwise noted)

Type no.	Spectral response range λ (nm)	Peak sensitivity wavelength λp (nm)	Saturation incident light level*2 Psat (nW)		Photosensitivity*2 S (mV/nW)		Conversion impedance Zt (V/A)		Cutoff frequency fc -3 dB (Hz)				
			H range	L range	H range	L range	H range	L range	H range		L range		
									Lower	Upper	Lower	Upper	
C10439-01	190 to 1100	960	23.6	2360	500	5	1 × 10 ⁹	1 × 10 ⁷	DC	10	DC	1 k	
C10439-02													
C10439-03													
C10439-07													
C10439-08													
C10439-09													
C10439-10	500 to 1700	1550	23600	2360000	0.5	0.005	1 × 10 ⁶	1 × 10 ⁴	DC	1 k	DC	100 k ³	
C10439-11													
C10439-15	320 to 2600	Si	940	23300	233000	0.45	0.045	1 × 10 ⁶	1 × 10 ⁵	DC	10 k	DC	100 k ³
		InGaAs	2300	17500	175000	0.6	0.06						

*2: λ=λp

*3: Output amplitude 2 Vp-p

Type no.	Cutoff wavelength λc (μm)	Peak sensitivity wavelength λp (μm)	Photosensitivity*4 S (mV/nW)		Conversion impedance Zt (V/A)		Cutoff frequency fc -3 dB (Hz)			
			H range	L range	H range	L range	H range		L range	
							Lower	Upper	Lower	Upper
C10439-14	5.3	4.1	0.045	0.0045	1 × 10 ⁷	1 × 10 ⁶	DC	100	DC	1 k

*4: λ=λp, uniform irradiation on the entire photosensitive area


Type no.	Maximum output amplitude voltage Vfs Output current Io=1 mA (V)		Output offset voltage Vos Dark state (mV)		Output noise voltage*5 Vn Dark state (mVp-p)		Output offset voltage drift*6 Dark state (mV/day)	
	Min.	Max.	Min.	Max.	Typ.	Max.	Min.	Max.
	C10439-01 C10439-02 C10439-03 C10439-07 C10439-08 C10439-09 C10439-10 C10439-11	+Vs - 0.5	+Vs - 0.2	-5	+5	2	5	-0.5
C10439-14			-60	+60				
C10439-15	+Vs - 3.3		-50	+50	6	10	-1	+1

*5: Within frequency band

*6: Dark voltage variation per day, measured at 25 °C after a 10-minute (C10439-15: 60-minute) warm-up after power-on


Block diagram

C10439-01/-02/-03/-07/-08/-09/-10/-11/-14

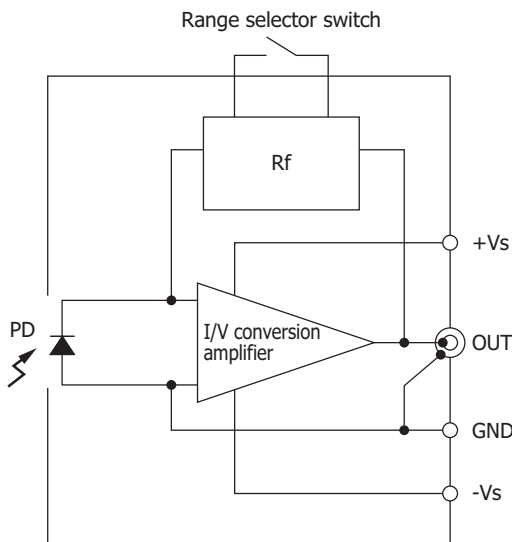

KACCC0364EB


C10439-15

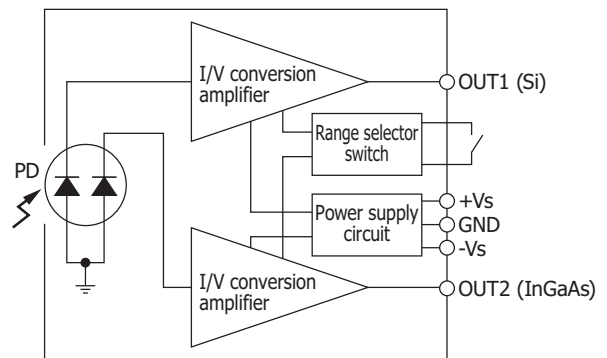


KACCC0918EA

C10439-01/-02/-03

Output voltage vs. incident light level

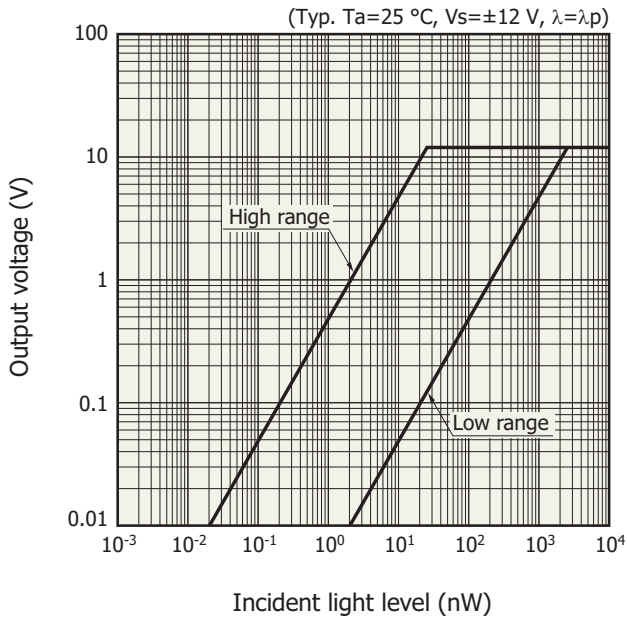


Spectral response

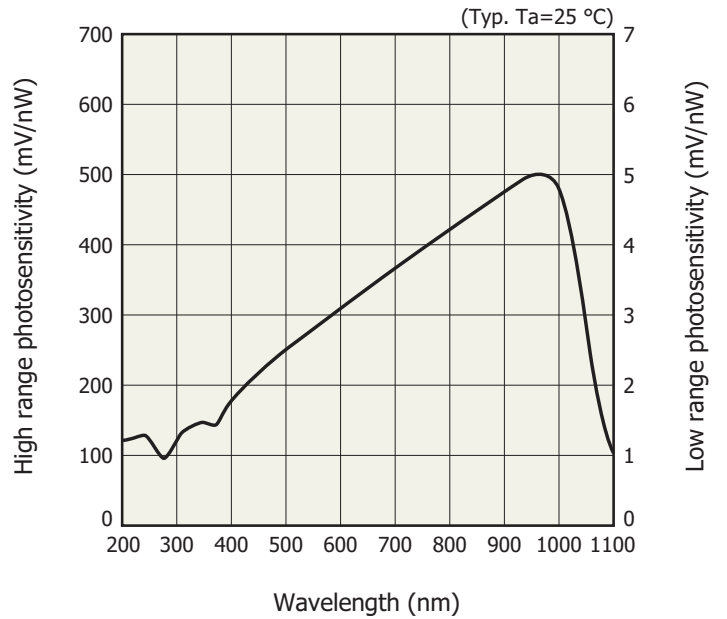


C10439-07/-08/-09

Output voltage vs. incident light level

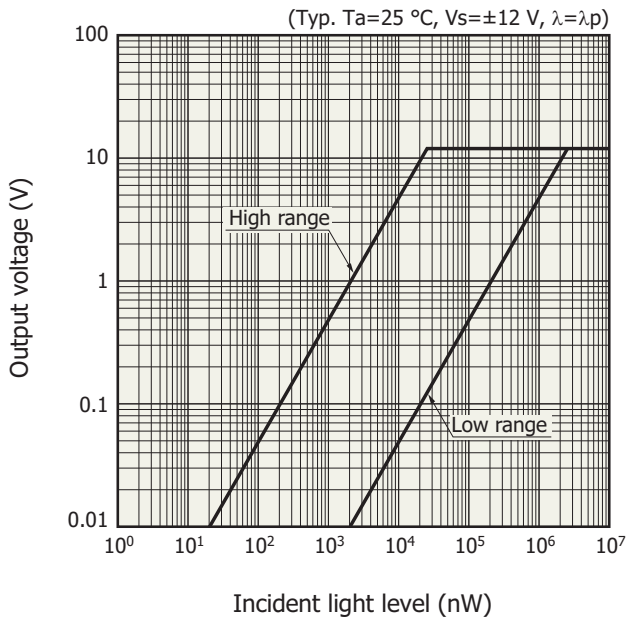


Spectral response

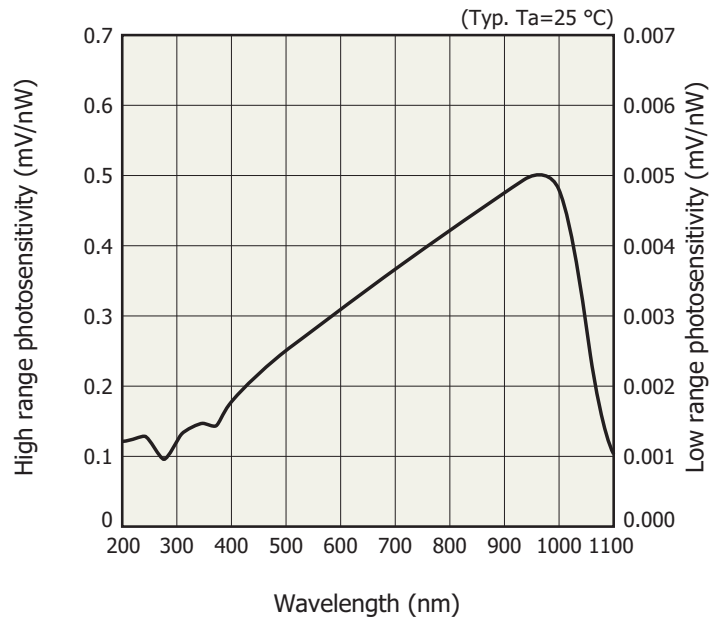


C10439-10/-11

Output voltage vs. incident light level

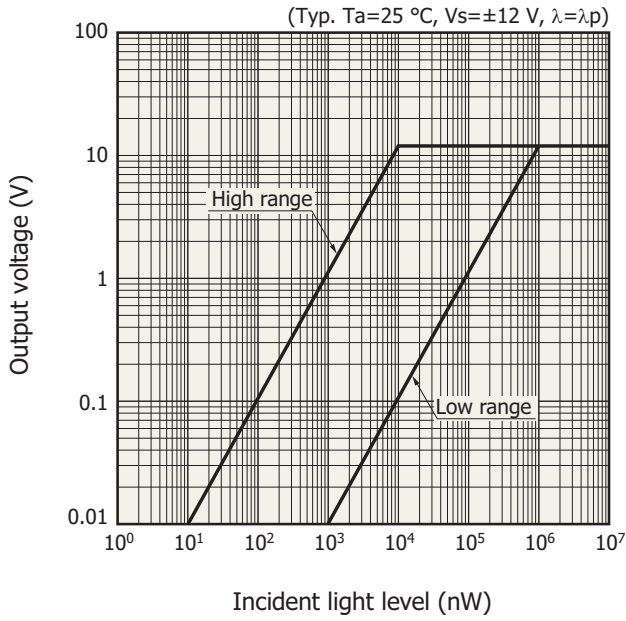


Spectral response

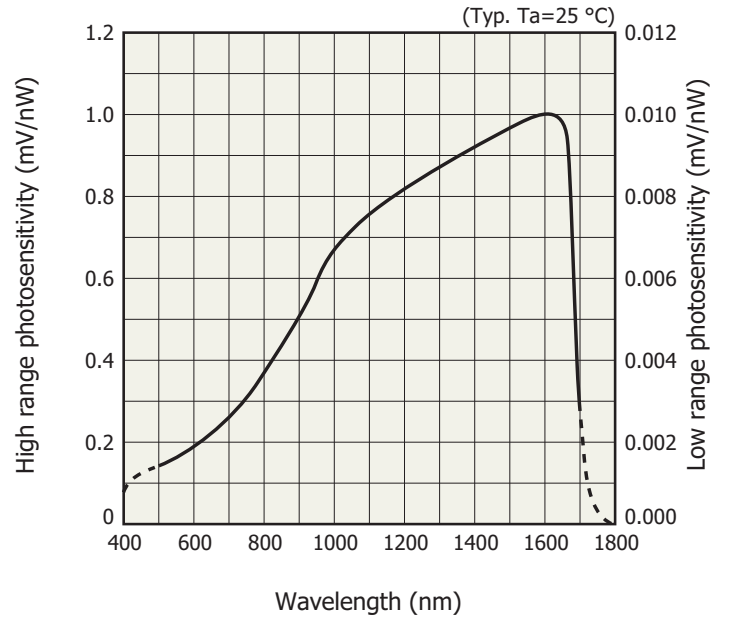


C10439-14

Output voltage vs. incident light level

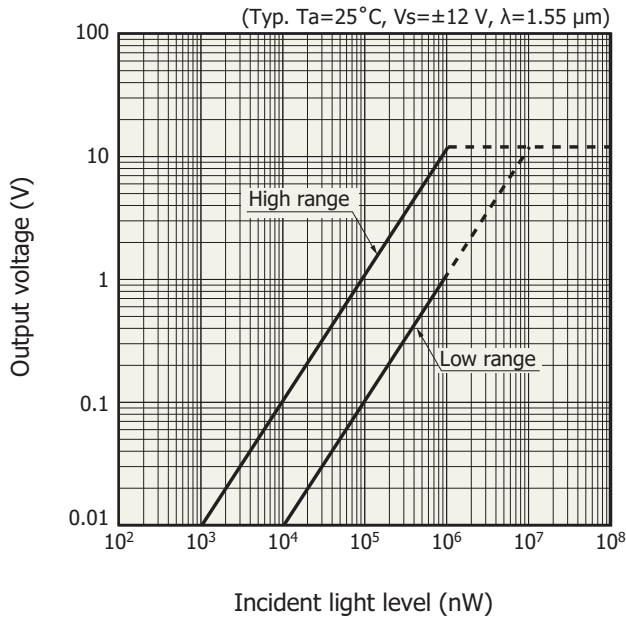


Spectral response

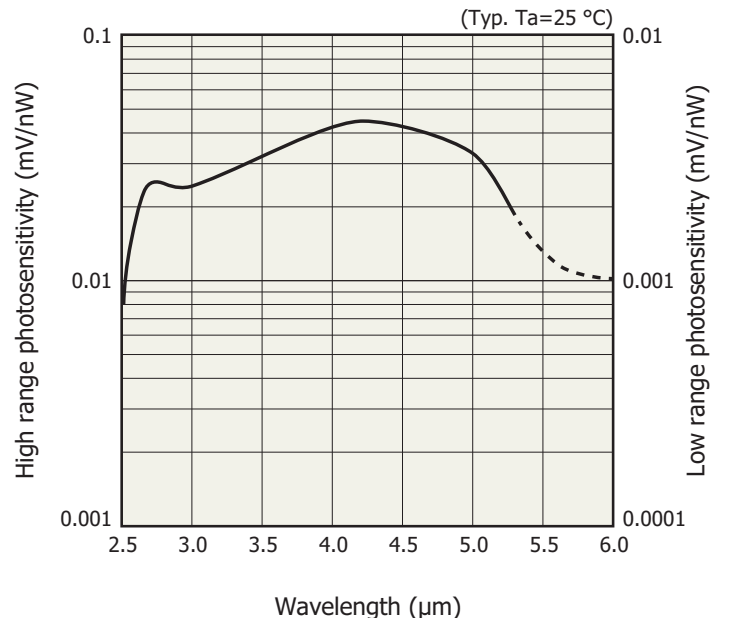


C10439-15

Output voltage vs. incident light level

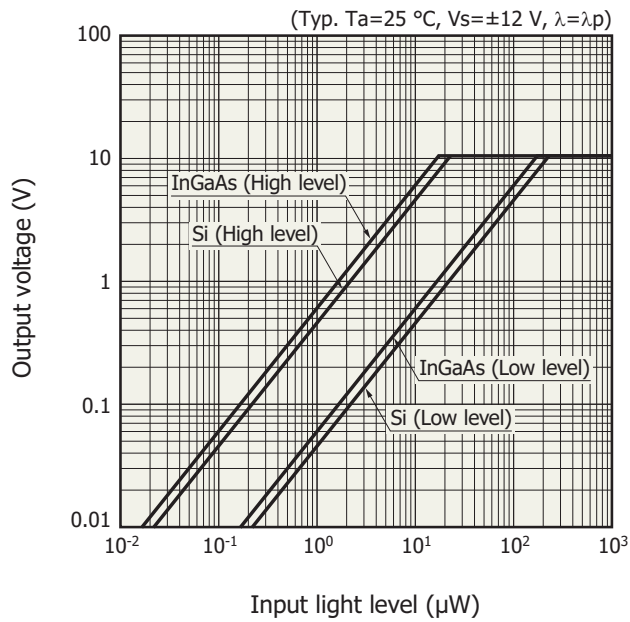

KACCB0534EA


Spectral response

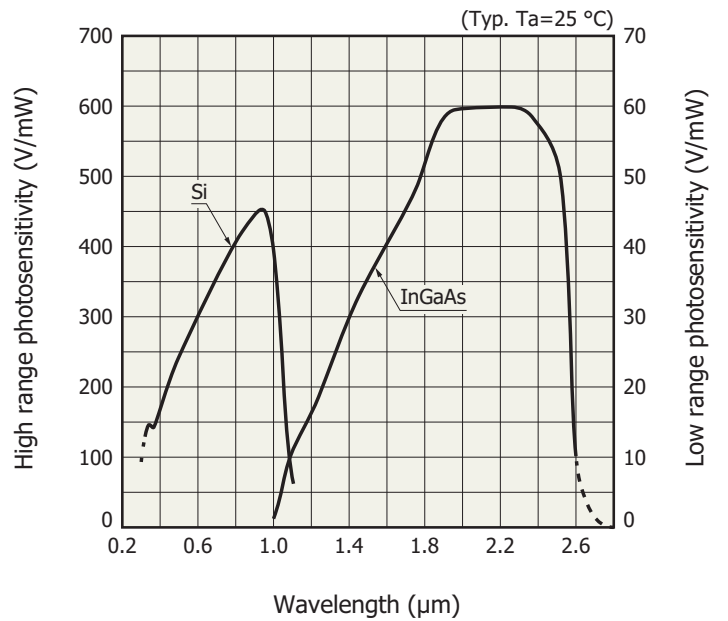

KACCB0535EA


Dimensional outlines (unit: mm, tolerance unless otherwise noted: ± 0.2)

C10439-01/-07

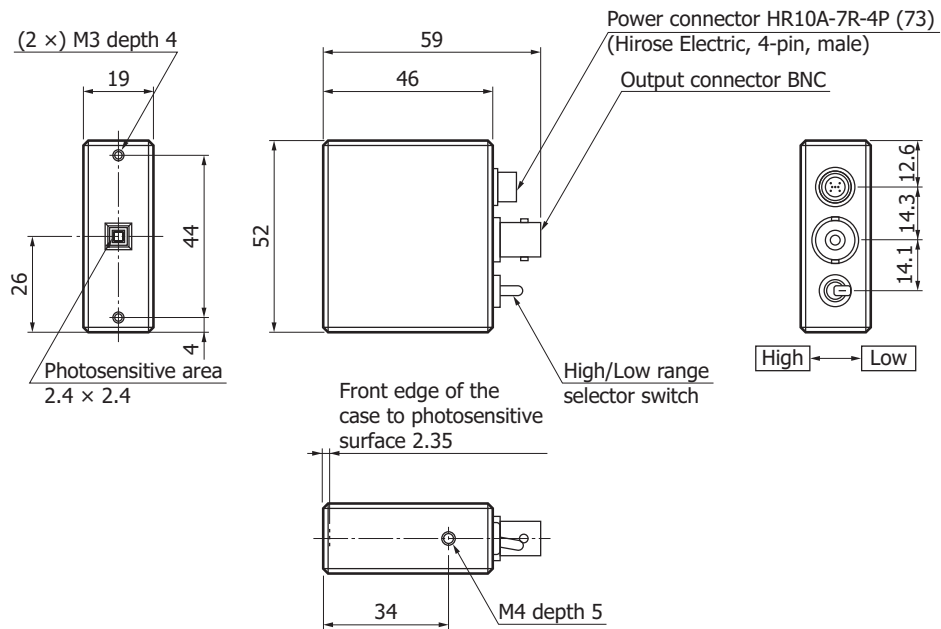


KACCA0203EB

C10439-02/-08

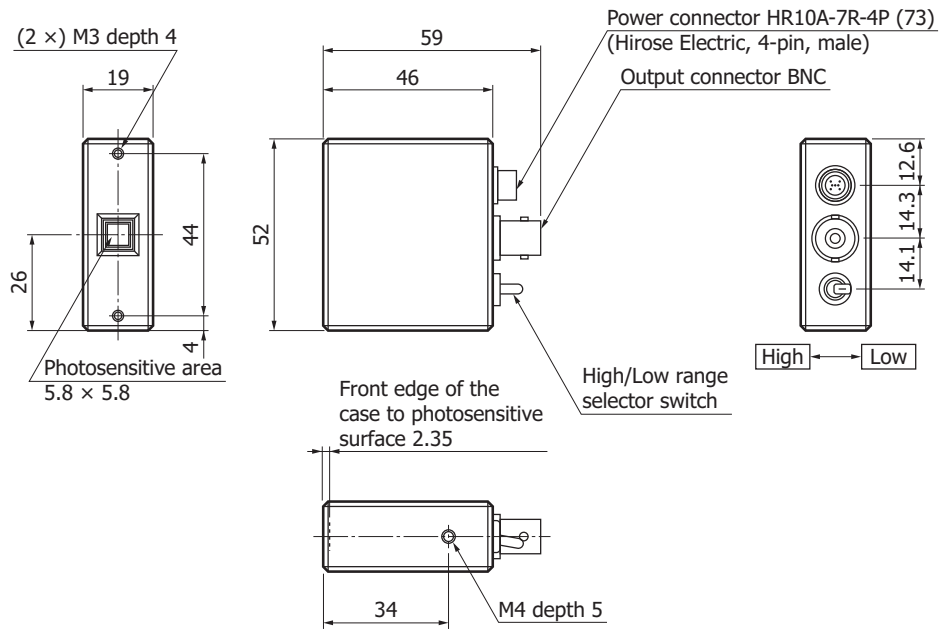


KACCA0204EB

C10439-03/-09

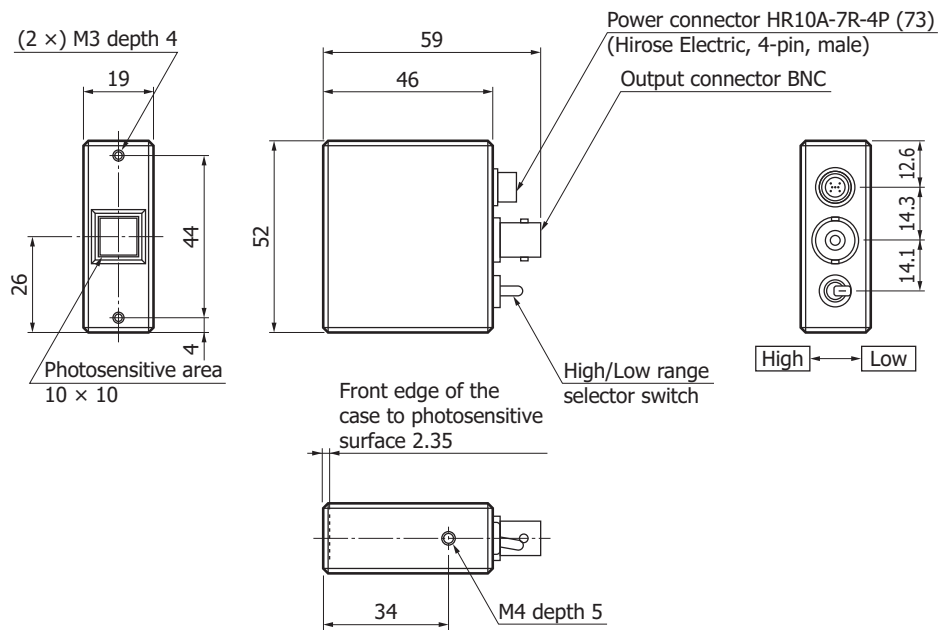


KACCA0205EB

C10439-10

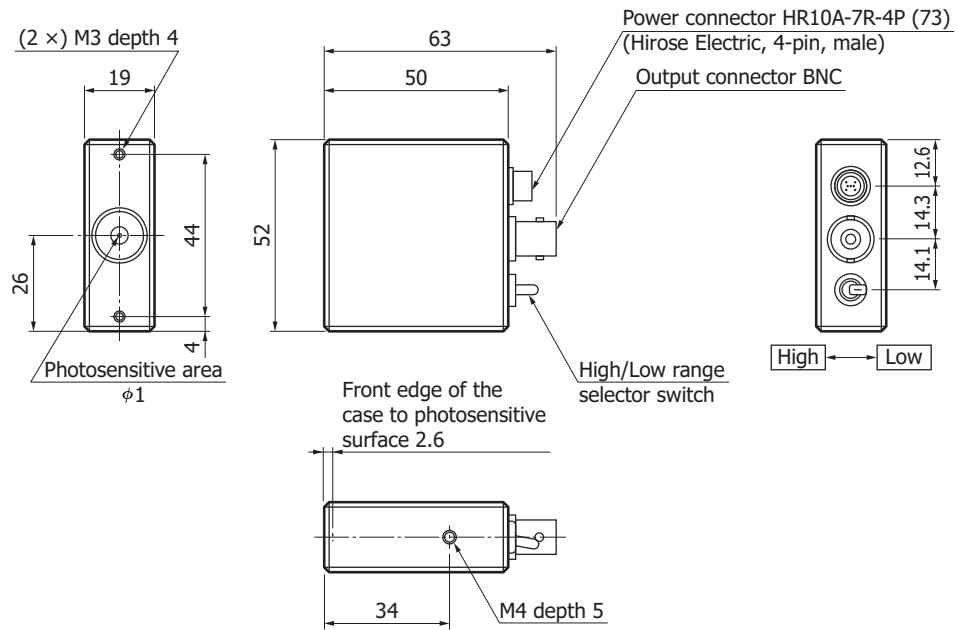


KACCA0327EA

C10439-11

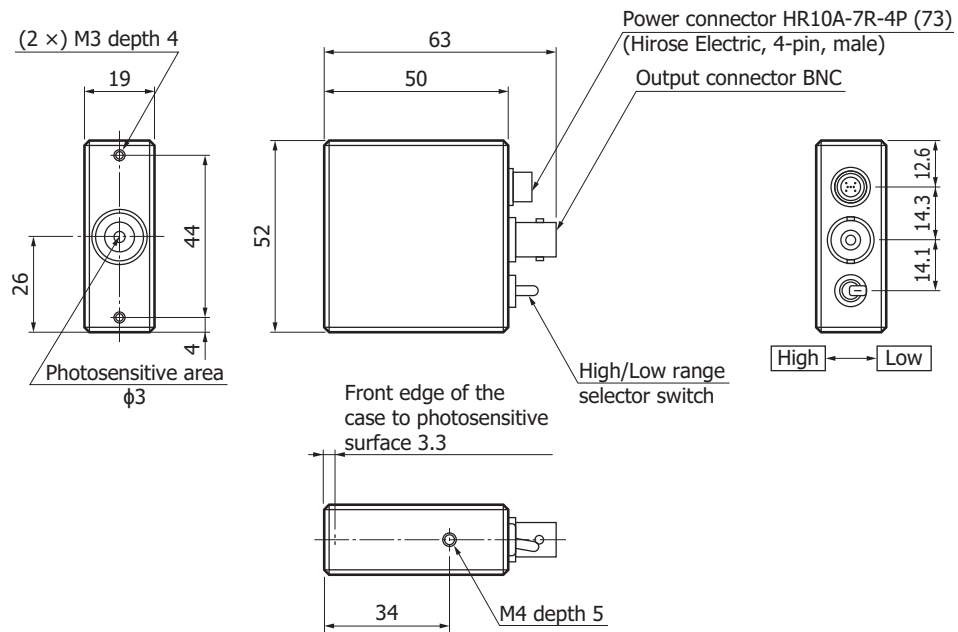


KACCA0328EA

C10439-14

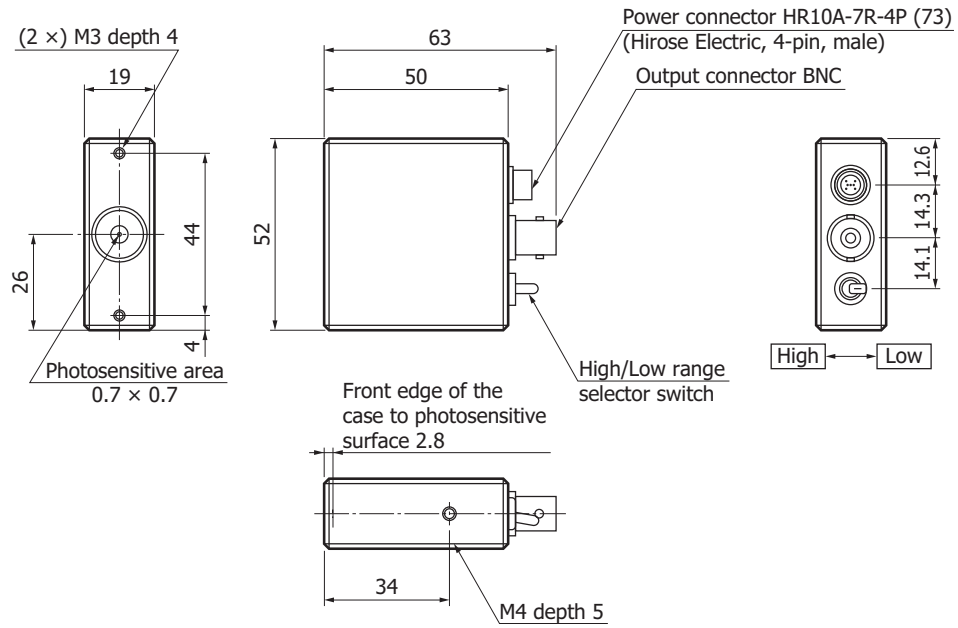


KACCA0376EA

C10439-15

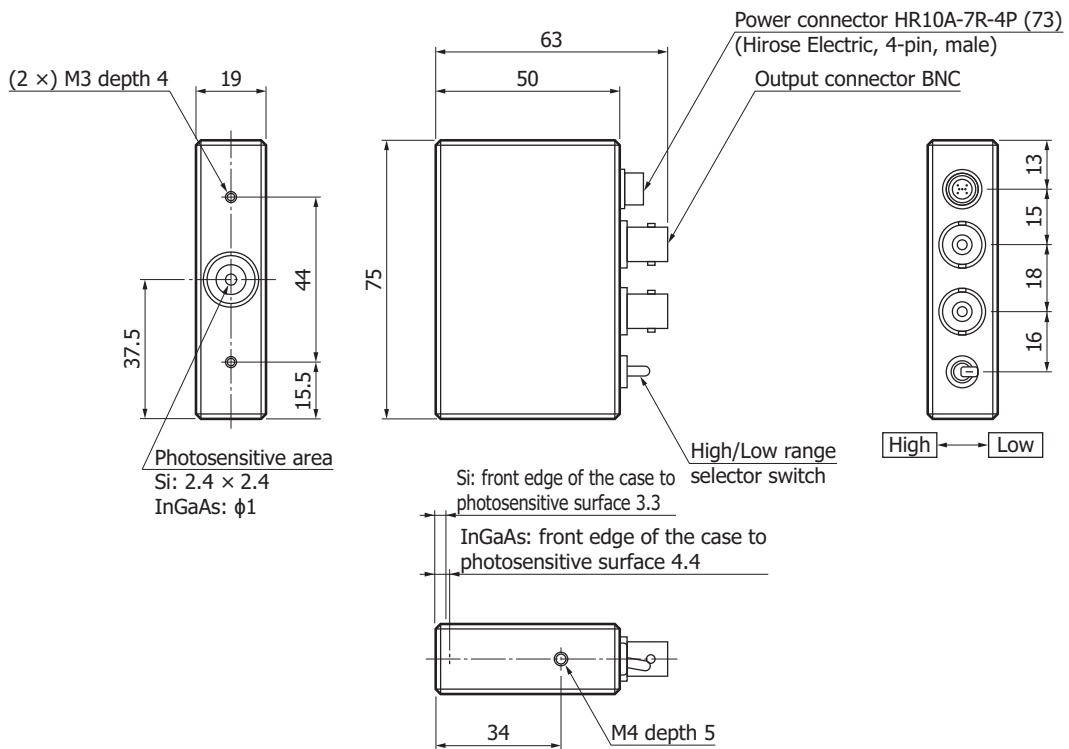

KACCA0419EA


Connection example

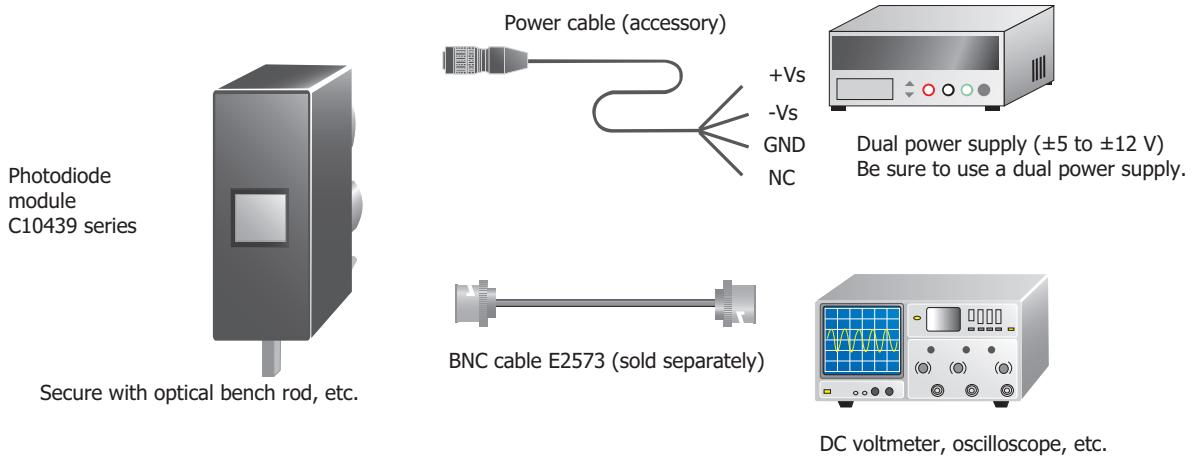

KACCC0365EC

Accessories (unit: mm)

- Instruction manual
- Cable for power supply (no connector on one end)

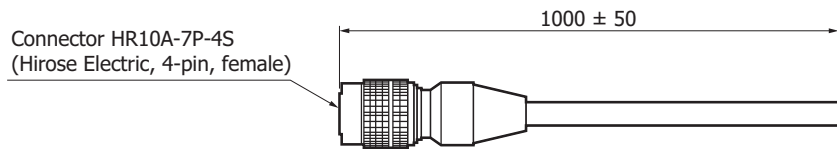

KACCA0194EA

Options (sold separately, unit: mm)

Optical fiber adapter A12781 series


This adapter is used to connect an optical fiber to the photodiode module.

Three connector types are available: FC, SC, and SMA.


Note:

- The optical fiber is not included.
- It may not be possible to monitor the total light level depending on the combinations of the photodiode, optical fiber, and fiber adapter that you are using. Select the appropriate components by carefully designing the optical system.


■ A12781-01 (for FC type optical fiber)

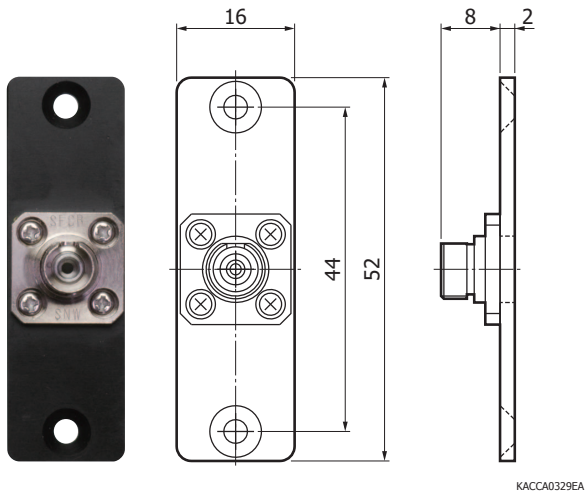

■ A12781-02 (for SC type optical fiber)

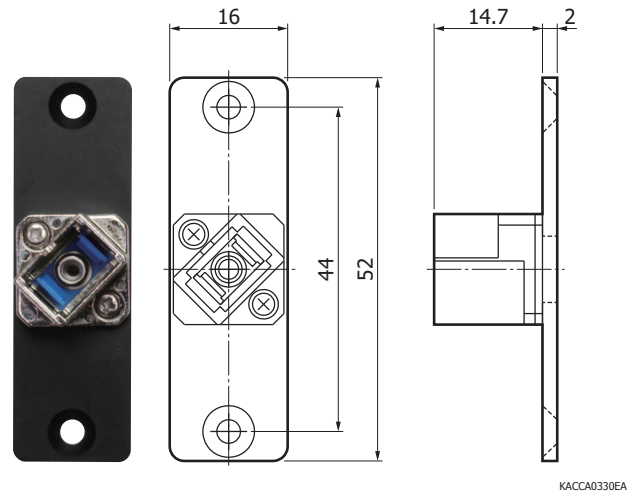


■ A12781-03 (for SMA type optical fiber)

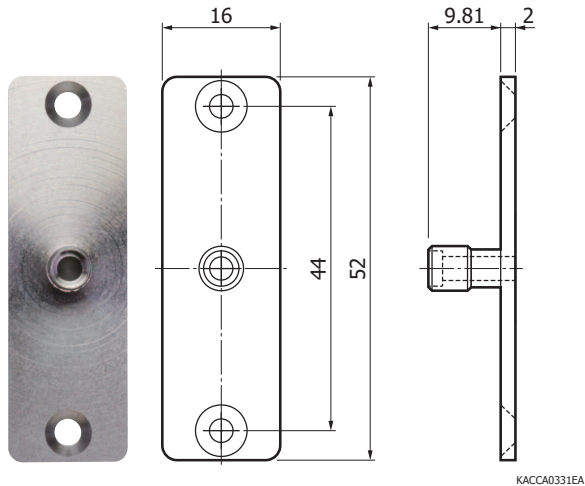

<Assembly procedure>

Fix the optical fiber adapter in place using the M3 screw holes in the front of the case. (M3 screws are supplied with the adapter.)

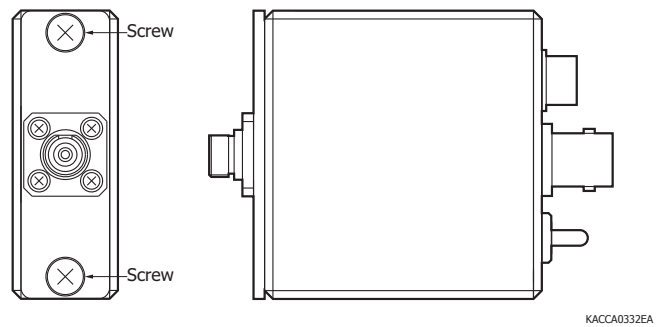


Optical fiber (SMA type) A9511

This SMA type optical fiber can be used with the photodiode module. The combination of this optical fiber with the SMA type optical fiber adapter (A12781-03) makes it easy to connect an optical fiber to the photodiode module.

Note: The SMA type optical fiber adapter (A12781-03) is not included.

■ Specifications

Photosensitive diameter: $\phi 2$ (bundled fiber)
 Photosensitive numerical aperture: 0.56

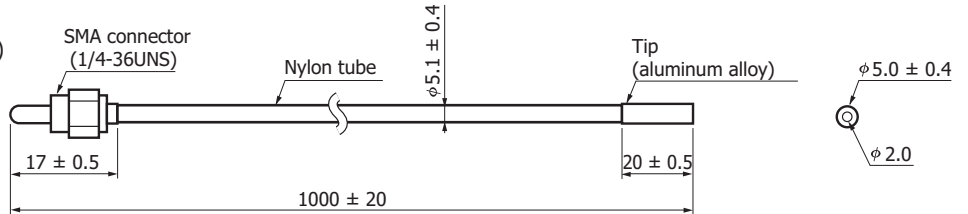


KACCA0333EA

BNC cable E2573

This cable can be used to extract signals from the photodiode module.

■ Specifications

Cable specifications: 1.5D-QEV

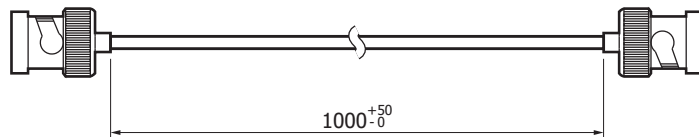

KACCA0334EA

Signal processing unit for photodiode module C10475

This unit converts the output from a photodiode module (C10439 series) into digital signals. High resolution digital output (16 bits) can be retrieved through a serial connection (RS-232C) from a PC. The supplied sample software can be used to easily load measurement data. For the specifications, refer to the C10475 datasheet.

■ Specifications

Size: 110 × 100 × 30



Related information

www.hamamatsu.com/sp/ssd/doc_en.html

- Precautions
- Disclaimer

Information described in this material is current as of November 2018.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

HAMAMATSU

www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, Bridgewater, N.J. 08807, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218, E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 8152-375-0, Fax: (49) 8152-265-8, E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10, E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777, E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Torshamnsgatan 35 16440 Kista, Sweden, Telephone: (46)8-509 031 00, Fax: (46)8-509 031 01, E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia S.r.l.: Strada della Moia, 1 int. 6, 20020 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41, E-mail: info@hamamatsu.it

China: Hamamatsu Photonics (China) Co., Ltd.: B1201, Jiaming Center, No.27 Dongsanhuan Beilu, Chaoyang District, Beijing 100020, China, Telephone: (86) 10-6586-6006, Fax: (86) 10-6586-2866, E-mail: hpc@hamamatsu.com.cn

Taiwan: Hamamatsu Photonics Taiwan Co., Ltd.: 8F-3, No. 158, Section2, Gongdao 5th Road, East District, Hsinchu, 300, Taiwan R.O.C. Telephone: (886)03-659-0080, Fax: (886)03-659-0081, E-mail: info@hamamatsu.com.tw